


Twin Fokus Plus

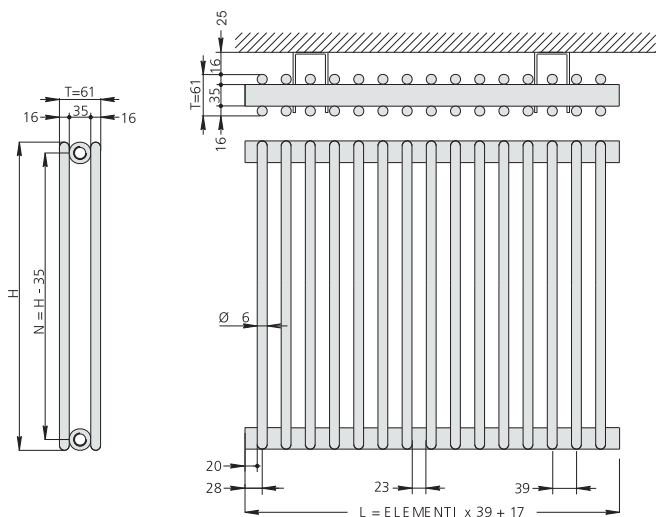

H = 535-570-635-650-720-735-835-850-970 mm min. 3 el. (L=144mm), max. 59 el. (L=2318mm)

H = 1470-1770-1970 mm min. 3 el. (L=144mm) max 30 el. (L=1889mm)

Rinforzi / Rinforzi:

H = 1470-1770-1970 mm: n.2 rinforzi sul retro del radiatore/nr.2 reinforcements on the back of the radiator

Accessori a corredo: sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

Accessories supplied: wall-mounting brackets - 1 vent and 1 blind

Allacciamenti standard/Standard connections



<Twin Fokus Plus>

Altezza/Height H (mm)	535	570	635	650	720	735	835	850	970	1470	1770	1970
Interasse/Con. cent N (mm)	500	535	600	615	685	700	800	815	935	1435	1735	1935
Peso/Weight P (Kg)	0,69	0,71	0,79	0,81	0,87	0,89	0,99	1,00	1,13	1,66	1,99	2,19
Capacità/Capacity (l)	0,22	0,23	0,25	0,26	0,28	0,28	0,31	0,32	0,35	0,50	0,58	0,64
Esponente/Exponent n	1,31	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32
Resa termica/Power Δt 50K (75/65/20 °C)	38	40	45	46	51	52	59	60	66	97	116	129

■ Misure per sostituzione radiatori in alluminio/Measures for replacing aluminum radiators




■ Misure per sostituzione radiatori in ghisa/Measures for replacing cast iron radiators

Nr. El.	L = mm	Altezza/Height H (mm)											
		535	570	635	650	720	735	835	850	970	1470	1770	1970
8 329 mm	W	304	320	360	368	408	416	472	480	528	776	928	1.032
10 407 mm	W	380	400	450	460	510	520	590	600	660	970	1.160	1.290
12 485 mm	W	456	480	540	552	612	624	708	720	792	1.164	1.392	1.548
14 563 mm	W	532	560	630	644	714	728	826	840	924	1.358	1.624	1.806
16 641 mm	W	608	640	720	736	816	832	944	960	1.056	1.552	1.856	2.064
18 719 mm	W	684	720	810	828	918	936	1.062	1.080	1.188	1.746	2.088	2.322
20 797 mm	W	760	800	900	920	1.020	1.040	1.180	1.200	1.320	1.940	2.320	2.580
22 875 mm	W	836	880	990	1.012	1.122	1.144	1.298	1.320	1.452	2.134	2.552	2.838
24 953 mm	W	912	960	1.080	1.104	1.224	1.248	1.416	1.440	1.584	2.328	2.784	3.096
26 1031 mm	W	988	1.040	1.170	1.196	1.326	1.352	1.534	1.560	1.716	2.522	3.016	3.354
28 1109 mm	W	1.064	1.120	1.260	1.288	1.428	1.456	1.652	1.680	1.848	2.716	3.248	3.612
30 1187 mm	W	1.140	1.200	1.350	1.380	1.530	1.560	1.770	1.800	1.980	2.910	3.480	3.870
32 1265 mm	W	1.216	1.280	1.440	1.472	1.632	1.664	1.888	1.920	2.112			
34 1343 mm	W	1.292	1.360	1.530	1.564	1.734	1.768	2.006	2.040	2.244			
36 1421 mm	W	1.368	1.440	1.620	1.656	1.836	1.872	2.124	2.160	2.376			
38 1499 mm	W	1.444	1.520	1.710	1.748	1.938	1.976	2.242	2.280	2.508			
40 1577 mm	W	1.520	1.600	1.800	1.840	2.040	2.080	2.360	2.400	2.640			
42 1655 mm	W	1.596	1.680	1.890	1.932	2.142	2.184	2.478	2.520	2.772			
44 1733 mm	W	1.672	1.760	1.980	2.024	2.244	2.288	2.596	2.640	2.904			
46 1811 mm	W	1.748	1.840	2.070	2.116	2.346	2.392	2.714	2.760	3.036			
48 1889 mm	W	1.824	1.920	2.160	2.208	2.448	2.496	2.832	2.880	3.168			
50 1967 mm	W	1.900	2.000	2.250	2.300	2.550	2.600	2.950	3.000	3.300			

ACCESSORI / ACCESSORIES



Twin Fokus Plus Orizzontale

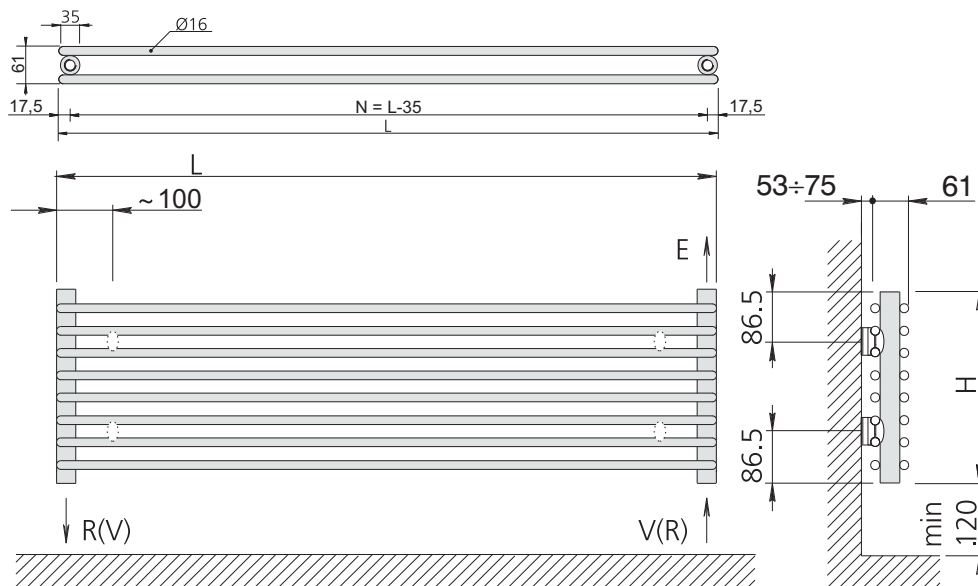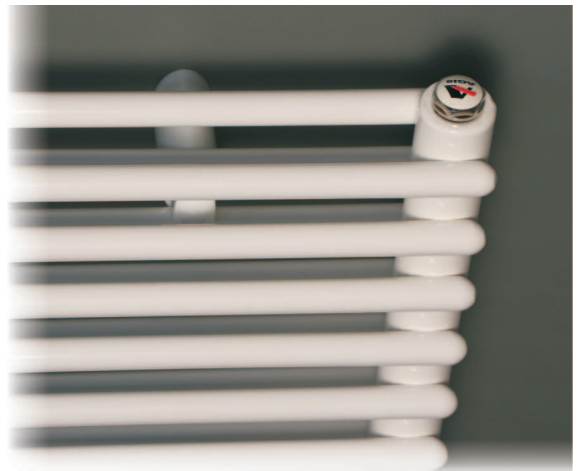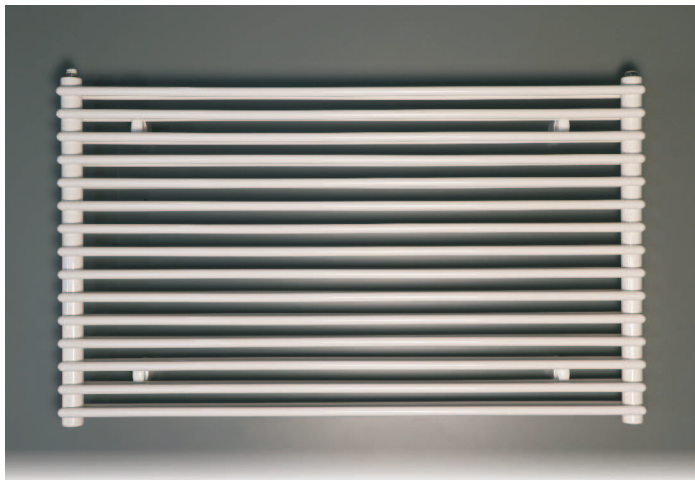

H = 535-570-635-650-720-735-835-850-970 mm
min. 3 el. (L=144mm), max. 59 el. (L=2318mm)


H = 1470-1770-1970 mm min. 3 el. (L=144mm)
max 30 el. (L=1187mm)

Rinforzi:
L = 1470-1770-1970 mm: n.2 rinforzi sul retro del radiatore/nr.2 reinforcements on the back of the radiator

Accessori a corredo: sostegni per il montaggio a parete - n°1 sfiato e n°1 cieco

Accessories supplied: wall-mounting brackets - 1 vent and 1 blind

Allacciamenti standard/Standard connections

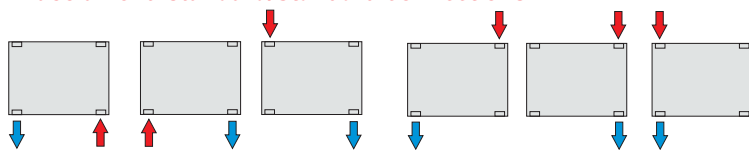

<Twin Fokus Orizzontale>

Larghezza/Width H (mm)	535	570	635	650	720	735	835	850	970	1470	1770	1970
Interasse/Con. cent N (mm)	500	535	600	615	685	700	800	815	935	1435	1735	1935
Peso/Weight P (Kg)	0,69	0,71	0,79	0,81	0,87	0,89	0,99	1,00	1,13	1,66	1,99	2,19
Capacità/Capacity (l)	0,22	0,23	0,25	0,26	0,28	0,28	0,31	0,32	0,35	0,50	0,58	0,64
Esponente/Exponent n	1,31	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32	1,32
Resa termica/Power Δt 50K (75/65/20 °C)	38	40	45	46	51	52	59	60	66	97	116	129

Nr. El.	H= mm	Larghezza/Width H (mm)											
		535	570	635	650	720	735	835	850	970	1470	1770	1970
8 329 mm	W	304	320	360	368	408	416	472	480	528	776	928	1.032
10 407 mm	W	380	400	450	460	510	520	590	600	660	970	1.160	1.290
12 485 mm	W	456	480	540	552	612	624	708	720	792	1.164	1.392	1.548
14 563 mm	W	532	560	630	644	714	728	826	840	924	1.358	1.624	1.806
16 641 mm	W	608	640	720	736	816	832	944	960	1.056	1.552	1.856	2.064
18 719 mm	W	684	720	810	828	918	936	1.062	1.080	1.188	1.746	2.088	2.322
20 797 mm	W	760	800	900	920	1.020	1.040	1.180	1.200	1.320	1.940	2.320	2.580
22 875 mm	W	836	880	990	1.012	1.122	1.144	1.298	1.320	1.452	2.134	2.552	2.838
24 953 mm	W	912	960	1.080	1.104	1.224	1.248	1.416	1.440	1.584	2.328	2.784	3.096
26 1031 mm	W	988	1.040	1.170	1.196	1.326	1.352	1.534	1.560	1.716	2.522	3.016	3.354
28 1109 mm	W	1.064	1.120	1.260	1.288	1.428	1.456	1.652	1.680	1.848	2.716	3.248	3.612
30 1187 mm	W	1.140	1.200	1.350	1.380	1.530	1.560	1.770	1.800	1.980	2.910	3.480	3.870
32 1265 mm	W	1.216	1.280	1.440	1.472	1.632	1.664	1.888	1.920	2.112			
34 1343 mm	W	1.292	1.360	1.530	1.564	1.734	1.768	2.006	2.040	2.244			
36 1421 mm	W	1.368	1.440	1.620	1.656	1.836	1.872	2.124	2.160	2.376			
38 1499 mm	W	1.444	1.520	1.710	1.748	1.938	1.976	2.242	2.280	2.508			
40 1577 mm	W	1.520	1.600	1.800	1.840	2.040	2.080	2.360	2.400	2.640			
42 1655 mm	W	1.596	1.680	1.890	1.932	2.142	2.184	2.478	2.520	2.772			
44 1733 mm	W	1.672	1.760	1.980	2.024	2.244	2.288	2.596	2.640	2.904			
46 1811 mm	W	1.748	1.840	2.070	2.116	2.346	2.392	2.714	2.760	3.036			
48 1889 mm	W	1.824	1.920	2.160	2.208	2.448	2.496	2.832	2.880	3.168			
50 1967 mm	W	1.900	2.000	2.250	2.300	2.550	2.600	2.950	3.000	3.300			

ACCESSORI / ACCESSORIES

